
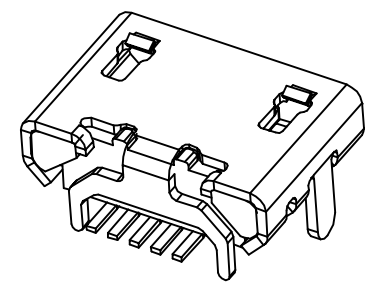
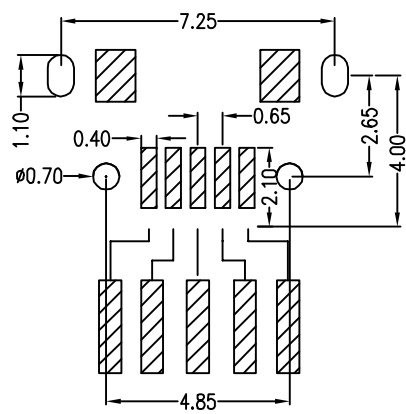



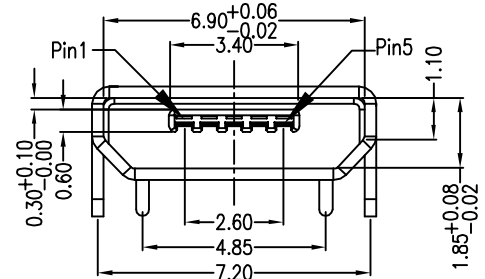


| REV. | ECN NO | LOCATIONS | DESCRIPTION | DATE |
|------|--------|-----------|-------------|------|
| | | | | |

A
B
C
D
E
F

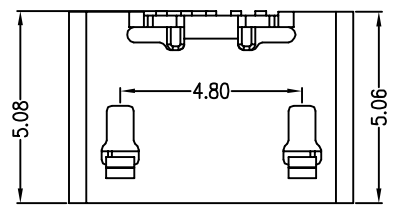

Note:
 1.Material:
 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
 1.2 Contact: copper alloy,t=0.15mm
 1.3 Shell: copper alloy,t=0.30mm
 2.Specification:
 2.1 Current rating: 1 A Max.
 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 2.3 Contact resistance: 50 mW Max.
 2.4 Insulation resistance: 100 MW Min.
 2.5 Total mating force: 3.57 Kgf Max.
 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X X X 1-067
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

- ① 产品代号 A:成品
- ② 产品系列 01: micro usb 5pin
- ③ 产品类别 S: 母座
- ④ 产品类型 B: B TYPE
- ⑤ 外壳材质 1: C2680R-H
- ⑥ 外壳电镀 0: 素材; 1: Ni100u"; 2: 雾Sn100u"; 3: Ni+Au1u" (圆); 4: 全Au1u"
- ⑦ 端子材质 4: OS191R-EH 2: C2680R-EH
- ⑧ 端子电镀 0: 素材; 1: 全Au1u"; 2: 全Au1.5u"; 3: 全Au3u"; 4: 全Au10u"; 5: 全Au16u"; 6: 全Au20u"; 7: 雾Sn+Au1u"; 8: 雾Sn+Au3u"; A: 雾锡+Au1u"; B: 雾锡Au1.5u"; C: 雾锡Au3u"; D: 雾锡Au5u"
- ⑨ 主体材质 1: LCP
- ⑩ 主体颜色 B: 黑色 W: 白色
- ⑪ 包装方式 1: 吸塑管; 2: 卷带; 4: pe袋
- ⑫ 下板类型 1: DIP
- ⑬ 细节流水 007: MICRO USB 5S B TYPE 四脚全插(牛角型)短针

| | | | |
|---------------------------|----------|----------------|--|
| PART NO: A01SBXXXXXX1-067 | | MATERIAL: COCO | |
| MODEL NO: XX | | FINSH: JANY | |
| UNIT: MM | SIZE: A4 | COLOR: JEFF | |
| TOLERANCE UNSPECIFIED | | DR: | |
| .x | 0.25 | CHK: | |
| .xx | 0.15 | APP: | |
| .xxx | 0.10 | | |
| Ang. | 2' | | |

深圳市鑫南天科技有限公司
 Shenzhen XinNanTian Industrial Co.,Ltd

TITLE:
MIRCO USB 5S B TYPE 四脚全插(牛角型)短针

DWG NO: A067 REV: A

SCALE: 5:1 DATE: 2012.05.02

A
B
C
D
E
F