

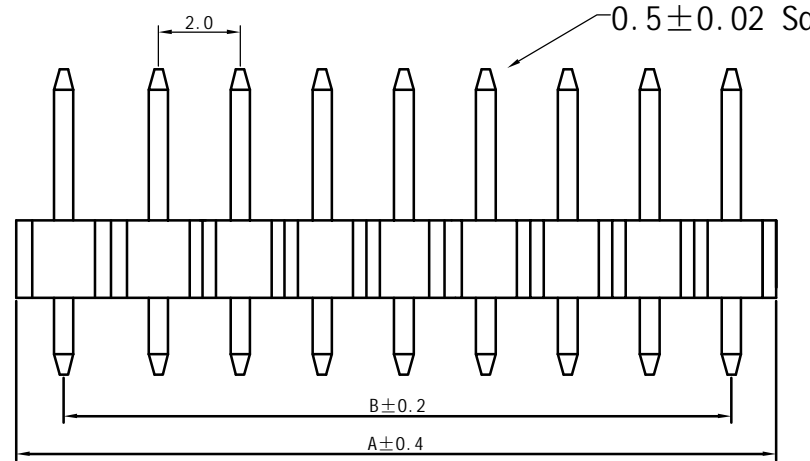
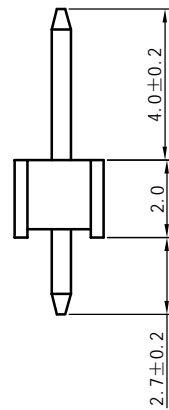


SPECIFICATIONS

Current Rating: 1Amps
 Insulator resistance: 5000 Megchms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40 °~ +105 °C
 Insulator Material: PBT
 Plating: Gold flash
UNSPECIFIED TOLERANCE: ±0.20

Dimensions list

Contacts Per row	Dimensions	
	A	B
1*1	2.0	0
1*2	4.0	2.0
1*3	6.0	4.0
1*4	8.0	6.0
1*5	10.0	8.0
1*6	12.0	10.0
1*7	14.0	12.0
1*8	16.0	14.0
1*9	18.0	16.0
1*10	20.0	18.0
1*11	22.0	20.0
1*12	24.0	22.0
1*13	26.0	24.0
1*14	28.0	26.0
1*15	30.0	28.0
1*16	32.0	30.0
1*17	34.0	32.0
1*18	36.0	34.0
1*19	38.0	36.0
1*20	40.0	38.0
1*21	42.0	40.0
1*22	44.0	42.0
1*23	46.0	44.0
1*24	48.0	46.0
1*25	50.0	48.0
1*26	52.0	50.0
1*27	54.0	52.0
1*28	56.0	54.0
1*29	58.0	56.0
1*30	60.0	58.0
1*31	62.0	60.0
1*32	64.0	62.0
1*33	66.0	64.0
1*34	68.0	66.0
1*35	70.0	68.0
1*36	72.0	70.0
1*37	74.0	72.0
1*38	76.0	74.0
1*39	78.0	76.0
1*40	80.0	78.0



PCB LAYOUT

鑫南天科技有限公司

公差 (TOLERANCE)		绘图 (DRAWN)	投影 (PROJECT)	料号 (PARTNO)	发行编号 (ISSUENO)
X. ±5°	X.				
.X ±2°	.X ±0.38	校对 (CHECKED)	单位 (UNIT)	图号 (DRAWNO)	页次 (PAGE)
.XX ±1°	.XX ±0.25	核准 (APPROVE)	比例 (SCALE)	品名 (NAME)	PH2.0 单排 180度 排针
.XXX ±0.5°	.XXX ±0.12		版本 (EDITION)		
			MM		
			5:1		
			A0		
			05-11-28		