

REMARKS:

- 附注:
1. MATERIAL (材料):
    - 1.1 HOUSING (本体): THERMOPLASTIC (热塑性塑胶料)  
COLOR (颜色): BLACK (黑色).
    - 1.2 CONTACT (接触件): COPPER ALLOY (铜合金)
  2. PLATING (电镀):
    - 2.1 CONTACT (接触件):  
PLATED GOLD 1U" OVER NICKEL AND 50u" MIN.  
镀镍底50u"以上, 在镍表面镀金

Technical Speciality 技术特性

Rated Voltage 额定电压: 50V AC/DC Max  
: 50V AC/DC Max


Current Rating (额定电流): 1.0A Max

Insulation Resistance (绝缘电阻): 1000MΩ Min

Contact Resistance (接触电阻): 100mΩ Max

Withstand Voltage (耐压): 500V AC/minute

Operating Temperature (工作温度): -25℃ ~ +85℃

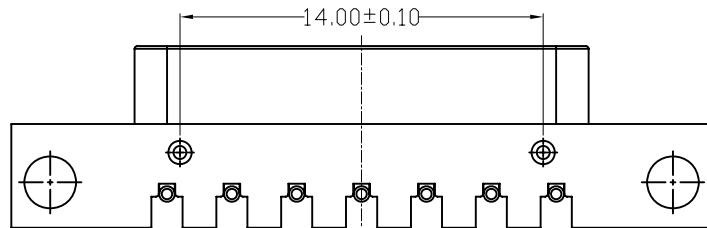

深圳市鑫南天科技有限公司  
Shenzhen XinNanTian Technology Co., Ltd

DIMENSIONS UNIT: mm

UNLESS OTHERWISE SPECIFIABLE

| DIMENSION | TOLERANCE |
|-----------|-----------|
| X, X:     | ± 0.38    |
| X, XX:    | ± 0.25    |
| X, XXX:   | ± 0.10    |
| ANGULAR:  | ± 1°      |

|   |                    |                     |
|---|--------------------|---------------------|
| PRODUCT NAME :<br>POGO PIN 7PIN FEMALE SOCKET | DRAWING :<br>COCO  | DATE:<br>2012/03/10 |
| PRODUCT NO. :<br>XNT-PG-07F-A-A0              | CHECK :<br>JANY    | DATE:<br>2012/03/11 |
| DRAWING NO. :<br>XNT-0086                     | APPROVED :<br>JEFF | DATE:<br>2012/03/11 |
| SCALE:<br>1:1                                 | DWG ID:<br>C D     | REV. :<br>A         |
|   |                    | PAGE:<br>1 OF 1     |

| REVISION NO. | ECR NO. | DESCRIPTION | MARK | DATE |
|--------------|---------|-------------|------|------|
| 1            |         |             |      |      |
| 2            |         |             |      |      |
| 3            |         |             |      |      |