



NOTES:

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.;



SCHEMATIC

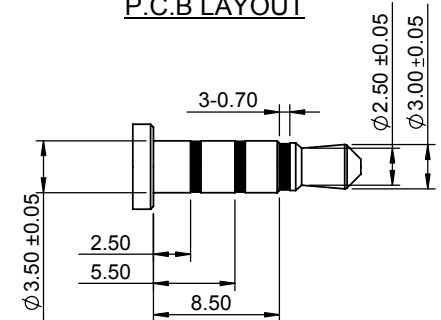

7	TERMINAL 6	COPPER ALLOY		Au PLATED
6	TERMINAL 5	COPPER ALLOY		Au PLATED
5	TERMINAL 4	COPPER ALLOY		Au PLATED
4	TERMINAL 3	COPPER ALLOY		Au PLATED
3	TERMINAL 2	COPPER ALLOY		Au PLATED
2	TERMINAL 1	COPPER ALLOY		Au PLATED
1	HOUSING	HIGH TEMP	BLACK	
NO.	DESCRIPTION	MAT,L	COLOR	REMARK

深圳市鑫南天科技有限公司
Shenzhen XinNanTian Industrial Co.,Ltd

CUSTOMER TITLE: ϕ 3.50 mm PHONE JACK CONNECTOR

COPY	PART NO.	XNTT06GA7ZL2
PRODUCT SPEC.	XNT-RJZ-0001895	
FILE NAME.	XNTT06GA7ZL2-C	
SCALE	5:1	UNIT:mm A4 SHEET: 1 of 1

Angle	$\pm 2^\circ$	DESIGN	COCO	07/06/12		
X	± 0.50	CHECK	JANY	07/06/12		
.X	± 0.30	APPRO.	JEFF	07/06/12		
.XX	± 0.15					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED
	A	07/06/12	NEW			