


PCB 焊盘区
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

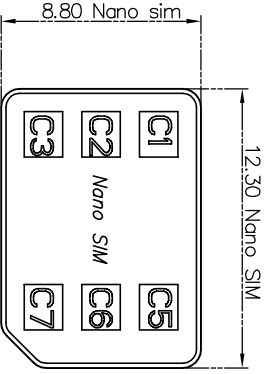

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy

SHELL: SIS

PLATING:

Contact: Plated 50μ'' Ni Overall Contact ALL Au 1U,

Shell: ALL Ni 300/MIN

Electrical:

Current Rating :0.5mA AC/DC max.

Voltage Rating :125V AC/DC

Ambient Temperature Range :-20° C~+60° C

Storage Temperature Range :-40° C~+70° C

Ambient Humidity Range :95% R. H. Max.

Contact Resistance:80m Ohms Max.

Insulation Resistance:100M Ohm./100V DC

Mating Cycles:5,000 Insertions

Reflow peak temp. : 260° C ±5° C, 3"5 S



深圳市鑫南天科技有限公司
Shen zhen Xin Nan Tian Technology Co., Ltd

DIMENSIONS INT: mm	PRODUCT NAME: NANO-SIM 标准式, 40H 6P	DRAWING: COCO	DATE: 2017/11/20
UNLESS OTHERWISE SPECIFIED	PRODUCT NO.: 0231 444G064	CONTR: JANY	DATE: 2017/11/20
DIMENSION TOLERANCE	DRAWING NO.: XNT-025	APPROVED: 林心祥	DATE: 2017/11/20
X.X: ± 0.15		SCALE: 1:1	FIG: A
X.XX: ± 0.10			
X.XXX: ± 0.06			
ANGULAR: ± 1°			

REVISION NO.	DCR NO.	DESCRIPTION	DATE	DATE
1				
2				